(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁷: G10L 21/02, G11B 20/24

(21) International Application Number:
PCT/IB2003/003356

(22) International Filing Date: 18 August 2003 (18.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and
(75) Inventor/Applicant (for US only): SAFFER, Zsolt [AT/AT]; Triester Strasse 64, A-1101 Vienna (AT).

(74) Agent: WEBER, Helmut; Philips Intellectual Property & Standards, Triester Strasse 64, A-1101 Vienna (AT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CLICKING NOISE DETECTION IN A DIGITAL AUDIO SIGNAL
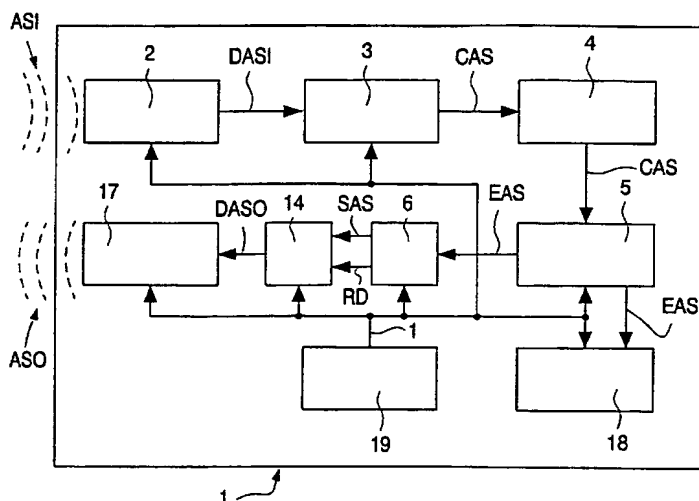
(57) Abstract: In a method (M) to detect a noise signal (PS1, PS2, PS3) in a digital audio signal (EAS), it is provided that the audio signal (EAS) is divided into successive signal sections (SAS), and the energy contents of successive signal sections (SAS) are determined, and the energy contents of a signal section (SAS) are evaluated in relation to an energy threshold (ET), and that the occurrence of at least one high-energy signal section having an energy content above the energy threshold (ET), and the occurrence of at least one signal section (SAS) preceding the at least one high-energy signal section and having an energy content below the energy threshold (ET), and the occurrence of at least one signal section (SAS) following the at least one high-energy signal section and having an energy content below the energy threshold (ET) are detected, and that a quantity of signal sections (SAS) that precede the at least one high-energy signal section and a quantity of high-energy signal sections and a quantity of signal sections (SAS) that follow the high-energy signal section are counted.